



Basic, Excellent, Premium Systems

Ceiling Tiles



Perfect for Ceilings
with Lots Behind them

Aesthetics and accessibility in perfect harmony



Vogl Ceiling Tiles are accessible, perforated ceiling panels with high acoustic performance for installation into T-profile systems.

The black acoustic fleece lining on the back (other colours on request) satisfies the highest demands on sound absorption.

Vogl Ceiling Tiles come with a factory-applied, pure white finishing coat (similar to RAL 9010).



Minor deviations in the product properties, in particular minor differences in colour and texture as well as insignificant deviations in length, width and thickness of the material delivered, are not considered defects. Mixing panel material from different production periods should be avoided. We advise ordering by the room.

- Mounting system:** Basic (T15/T24) exposed grid
- Based on standard:** EN 14190 "Gypsum plasterboard products from reprocessing"
- Fire rating:** A2-s1, d0 (non-flammable) according to EN 13501-1
- Long edge:** SK (sharp-edged)
- Short edge:** SK (sharp-edged)



Illustration	Item number	Description	Details	Pcs./PU PU/pallet
	KAS-00001	GP-K Basic 600 T15/T24 non-perforated	600 x 600 x 12.5 mm	6 pieces
	KAS-00021	GP-K Basic 625 T15/T24 non-perforated	625 x 625 x 12.5 mm	28 PU
	KAS-00002	GP-K Basic 600 T15/T24 6/18R AVS	600 x 600 x 12.5 mm	6 pieces
	KAS-00022	GP-K Basic 625 T15/T24 6/18R AVS	625 x 625 x 12.5 mm	28 PU
		Acoustic fleece, black		
	KAS-00004	GP-K Basic 600 T15/T24 8/18R AVS	600 x 600 x 12.5 mm	6 pieces
	KAS-00023	GP-K Basic 625 T15/T24 8/18R AVS	625 x 625 x 12.5 mm	28 PU
		Acoustic fleece, black		
	KAS-00012	GP-K Basic 600 T15/T24 12/20/66R AVS	600 x 600 x 12.5 mm	6 pieces
	KAS-00026	GP-K Basic 625 T15/T24 12/20/66R AVS	625 x 625 x 12.5 mm	28 PU
		Acoustic fleece, black		
	KAS-00013	GP-K Basic 600 T15/T24 8/18Q AVS	600 x 600 x 12.5 mm	6 pieces
	KAS-00027	GP-K Basic 625 T15/T24 8/18Q AVS	625 x 625 x 12.5 mm	28 PU
		Acoustic fleece, black		
	KAS-00015	GP-K Basic 600 T15/T24 12/25Q AVS	600 x 600 x 12.5 mm	6 pieces
	KAS-00029	GP-K Basic 625 T15/T24 12/25Q AVS	625 x 625 x 12.5 mm	28 PU
		Acoustic fleece, black		
	KAS-00137	GP-K Basic 600 T15/T24 5/82/15.4SL AVS	600 x 600 x 12.5 mm	6 pieces
	KAS-00138	GP-K Basic 625 T15/T24 5/82/15.4SL AVS	625 x 625 x 12.5 mm	28 PU
		Acoustic fleece, black		
	KAS-00019	GP-K Basic 600 T15/T24 3.5/9Q AVS	600 x 600 x 12.5 mm	6 pieces
	KAS-00030	GP-K Basic 625 T15/T24 3.5/9Q AVS	625 x 625 x 12.5 mm	28 PU
		Acoustic fleece, black		

Further perforation patterns/dimensions available on request

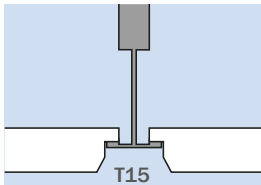

Vogl Ceiling Tiles are accessible, perforated ceiling panels with high acoustic performance for installation into T-profile systems.

The black acoustic fleece lining on the back (other colours on request) satisfies the highest demands on sound absorption.

Vogl Ceiling Tiles come with a factory-applied, pure white finishing coat (similar to RAL 9010).



Minor deviations in the product properties, in particular minor differences in colour and texture as well as insignificant deviations in length, width and thickness of the material delivered, are not considered defects. Mixing panel material from different production periods should be avoided. We advise ordering by the room.

- Mounting system:** Excellent (T15) rebated grid
- Based on standard:** EN 14190 "Gypsum plasterboard products from reprocessing"
- Fire rating:** A2-s1, d0 (non-flammable) according to EN 13501-1
- Long edge:** FK T15 (bevelled), type Excellent
- Short edge:** FK T15 (bevelled), type Excellent



Illustration	Item number	Description	Details	Pcs./PU PU/pallet
	KAS-00039	GP-K Excellent 600 T15 non-perforated	600 x 600 x 12.5 mm	6 pieces
	KAS-00066	GP-K Excellent 625 T15 non-perforated	625 x 625 x 12.5 mm	28 PU
	KAS-00040	GP-K Excellent 600 T15 6/18R AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pieces
	KAS-00067	GP-K Excellent 625 T15 6/18R AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	KAS-00042	GP-K Excellent 600 T15 8/18R AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pieces
	KAS-00139	GP-K Excellent 625 T15 8/18R AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	KAS-00046	GP-K Excellent 600 T15 12/20/66R AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pieces
	KAS-00068	GP-K Excellent 625 T15 12/20/66R AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	KAS-00048	GP-K Excellent 600 T15 8/18Q AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pieces
	KAS-00069	GP-K Excellent 625 T15 8/18Q AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	KAS-00049	GP-K Excellent 600 T15 12/25Q AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pieces
	KAS-00071	GP-K Excellent 625 T15 12/25Q AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	KAS-00140	GP-K Excellent 600 T15 5/82/15.4SL AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pieces
	KAS-00141	GP-K Excellent 625 T15 5/82/15.4SL AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	KAS-00052	GP-K Excellent 600 T15 3.5/9Q AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pieces
	KAS-00072	GP-K Excellent 625 T15 3.5/9Q AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU

Further perforation patterns/dimensions available on request

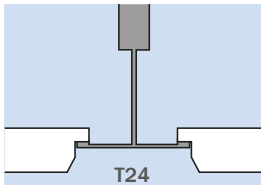

Vogl Ceiling Tiles are accessible, perforated ceiling panels with high acoustic performance for installation into T-profile systems.

The black acoustic fleece lining on the back (other colours on request) satisfies the highest demands on sound absorption.

Vogl Ceiling Tiles come with a factory-applied, pure white finishing coat (similar to RAL 9010).



Minor deviations in the product properties, in particular minor differences in colour and texture as well as insignificant deviations in length, width and thickness of the material delivered, are not considered defects. Mixing panel material from different production periods should be avoided. We advise ordering by the room.

- Mounting system:** Excellent (T24) rebated grid
Based on standard: EN 14190 "Gypsum plasterboard products from reprocessing"
Fire rating: A2-s1, d0 (non-flammable) according to EN 13501-1
Long edge: FK T24 (bevelled), type Excellent
Short edge: FK T24 (bevelled), type Excellent



Illustration	Item number	Description	Details	Pcs./PU PU/pallet
	KAS-00054	GP-K Excellent 600 T24 non-perforated	600 x 600 x 12.5 mm	6 pieces
	KAS-00074	GP-K Excellent 600 T24 non-perforated	625 x 625 x 12.5 mm	28 PU
	KAS-00055	GP-K Excellent 600 T24 6/18R AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pieces
	KAS-00075	GP-K Excellent 625 T24 6/18R AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	KAS-00056	GP-K Excellent 600 T24 8/18R AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pieces
	KAS-00119	GP-K Excellent 625 T24 8/18R AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	KAS-00142	GP-K Excellent 600 T24 12/20/66R AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pieces
	KAS-00077	GP-K Excellent 625 T24 12/20/66R AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	KAS-00059	GP-K Excellent 600 T24 8/18Q AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pieces
	KAS-00078	GP-K Excellent 625 T24 8/18Q AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	KAS-00060	GP-K Excellent 600 T24 12/25Q AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pieces
	KAS-00079	GP-K Excellent 625 T24 12/25Q AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	KAS-00143	GP-K Excellent 600 T24 5/82/15.4SL AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pieces
	KAS-00144	GP-K Excellent 625 T24 5/82/15.4SL AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	KAS-00064	GP-K Excellent 600 T24 3.5/9Q AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pieces
	KAS-00080	GP-K Excellent 625 T24 3.5/9Q AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU

Further perforation patterns/dimensions available on request

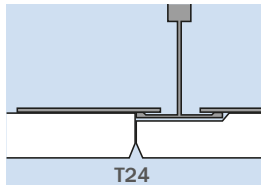

Vogl Ceiling Tiles are accessible, perforated ceiling panels with high acoustic performance for installation into T-profile systems.

The black acoustic fleece lining on the back (other colours on request) satisfies the highest demands on sound absorption.

Vogl Ceiling Tiles come with a factory-applied, pure white finishing coat (similar to RAL 9010).

Minor deviations in the product properties, in particular minor differences in colour and texture as well as insignificant deviations in length, width and thickness of the material delivered, are not considered defects. Mixing panel material from different production periods should be avoided.

Mixing panel material from different production periods should be avoided. Differences in colour and texture might otherwise ensue. We advise ordering by the room.


- Mounting system:** Premium (T24) concealed grid
- Based on standard:** EN 14190 "Gypsum plasterboard products from reprocessing"
- Fire rating:** A2-s1, d0 (non-flammable) according to EN 13501-1
- Long edge:** FK T24 (bevelled), type Premium
- Short edge:** FK T24 (bevelled), type Premium




Illustration	Item number	Description	Details	Pcs./PU PU/pallet
	KAS-00093	GP-K Premium 600 T24 non-perforated	600 x 600 x 12.5 mm	6 pieces
	KAS-00104	GP-K Premium 625 T24 non-perforated	625 x 625 x 12.5 mm	28 PU
	KAS-00094	GP-K Premium 600 T24 6/18R AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pieces
	KAS-00105	GP-K Premium 625 T24 6/18R AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	KAS-00096	GP-K Premium 600 T24 8/18R AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pieces
	KAS-00145	GP-K Premium 625 T24 8/18R AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	KAS-00146	GP-K Premium 600 T24 12/20/66R AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pieces
	KAS-00147	GP-K Premium 625 T24 12/20/66R AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	KAS-00097	GP-K Premium 600 T24 8/18Q AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pieces
	KAS-00106	GP-K Premium 625 T24 8/18Q AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	KAS-00099	GP-K Premium 600 T24 12/25Q AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pieces
	KAS-00107	GP-K Premium 625 T24 12/25Q AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	KAS-00148	GP-K Premium 600 T24 5/82/15.4SL AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pieces
	KAS-00149	GP-K Premium 625 T24 5/82/15.4SL AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	KAS-00102	GP-K Premium 600 T24 3.5/9Q AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pieces
	KAS-00108	GP-K Premium 625 T24 3.5/9Q AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU

Further perforation patterns/dimensions available on request

Basic T15/T24 ("exposed" grid):

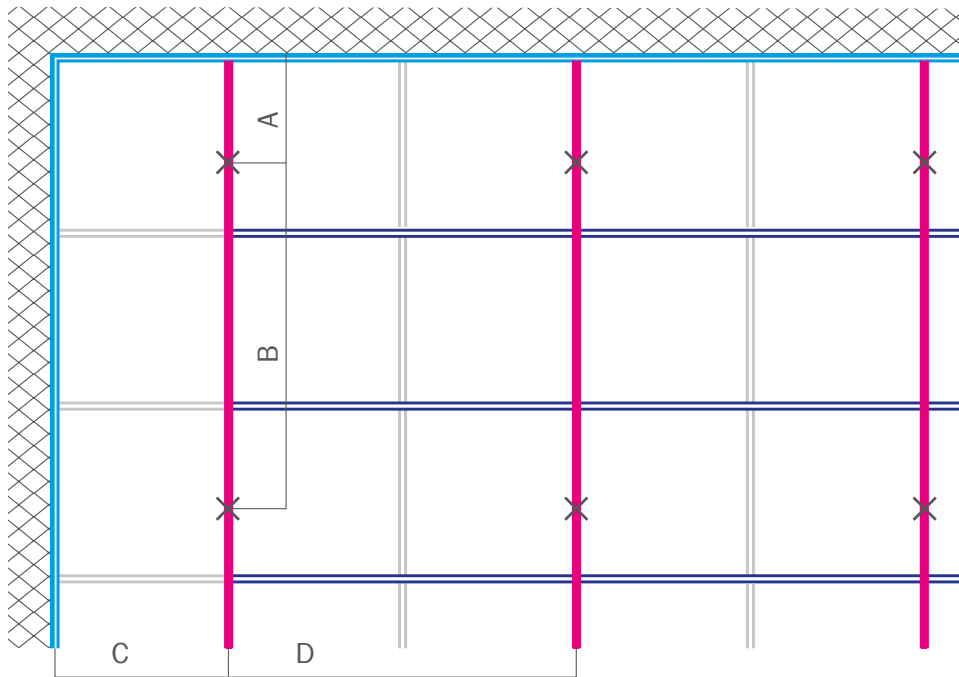


A = max. 400 mm B = max. 1,200/1,250 mm C = max. 600/625 mm D = 600/1,200 mm or 625/1,250 mm

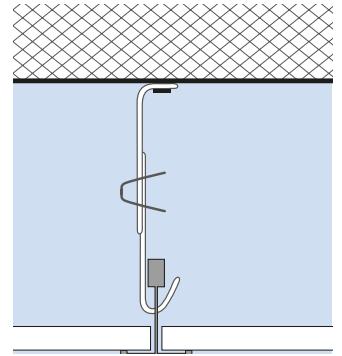


- Wall angle or stepped wall angle
- Secondary profile
- Cross profile "long"
- Cross profile "short"
- Quick hanger (type dependent on suspension height)

Excellent T15/T24 ("rebated" grid):


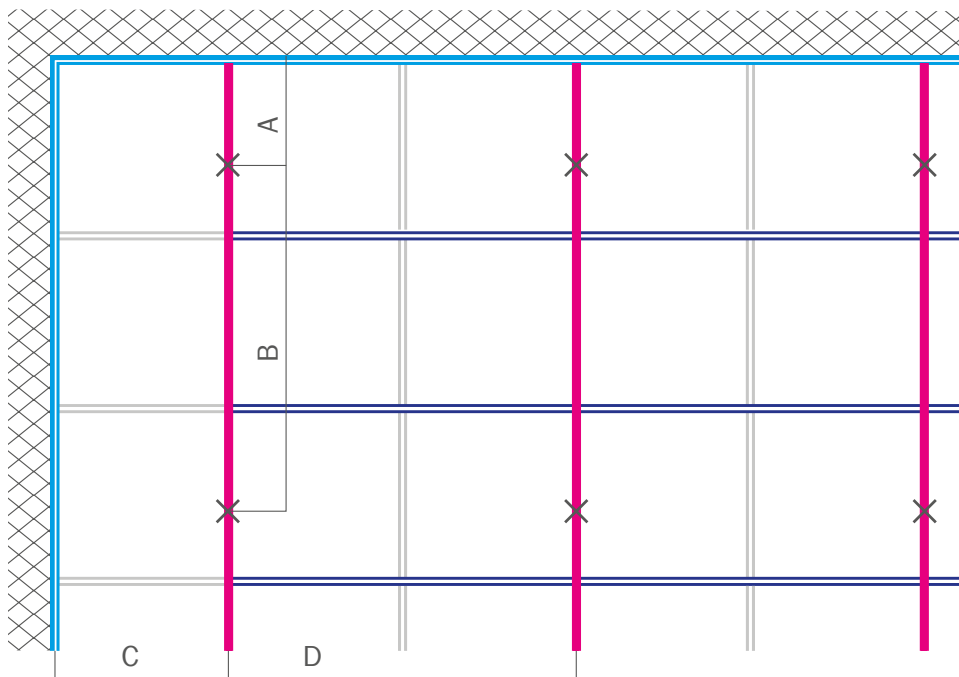


A = max. 400 mm B = max. 1,200/1,250 mm C = max. 600/625 mm D = 600/1,200 mm or 625/1,250 mm

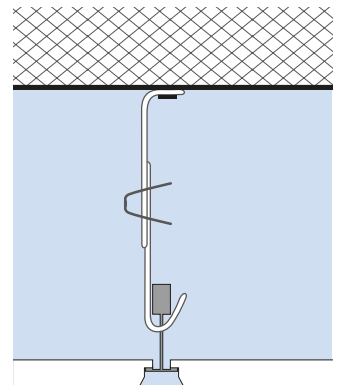

- Wall angle or stepped wall angle
- Secondary profile
- Cross profile "long"
- Cross profile "short"
- Quick hanger (type dependent on suspension height)

Premium T24 ("concealed" grid):

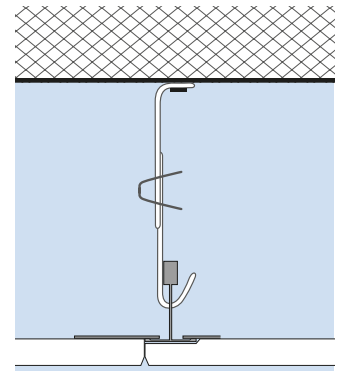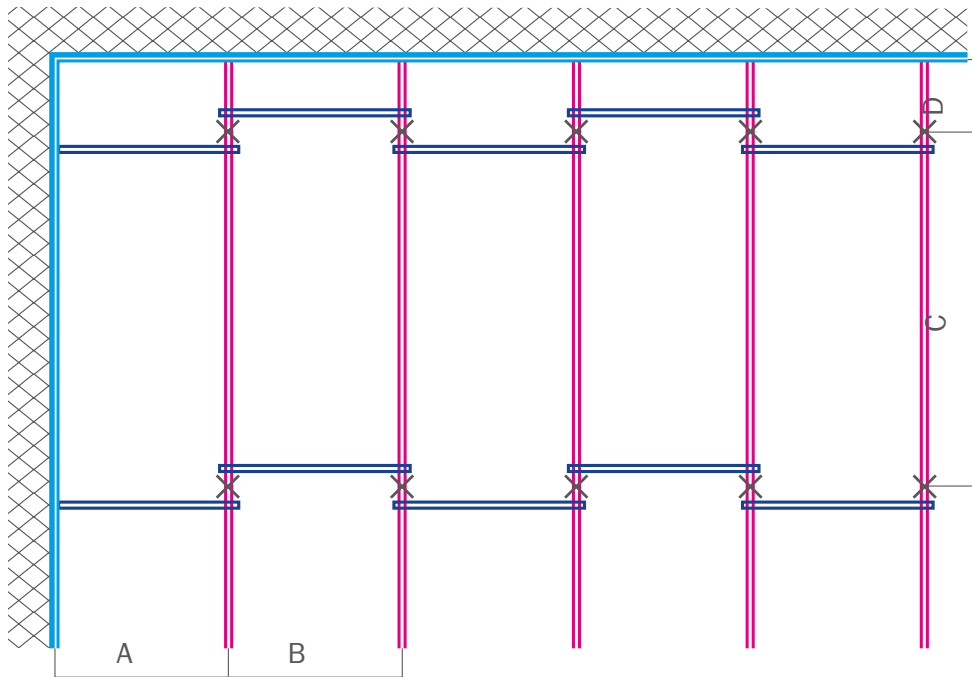


- Wall angle or stepped wall angle
- Secondary profile
- Spacer
- Quick hanger (type dependent on suspension height)

A = max. 600/625 mm B = max. 600/625 mm C = max. 1,500 mm D = max. 100 mm

Possible suspended brackets:

Standard suspension:	Item numbers		Item numbers	
	100961 100962 100963 101810	Easy-span hanger hooked wire/hooked wire		100926 Quick hanger T-profile
	100965 100966 100967 100968	Easy-span hanger hooked wire/eyelet wire		100927 Quick hanger T-profile Klick Fix II
Rigid suspension:	Item numbers		Item numbers	
	100975	Vernier suspended bracket, bottom part for T-profile		100969 100970 100971 Vernier short hanger set, for T-profile


Alignment of ceiling framework must always be started in room centre. Observe framework manufacturer's installation instructions.



General site conditions:

- Site temperature should not fall below +5 °C
- Avoid major fluctuations in temperature and humidity
- Always store tiles in a dry place, protected against moisture
- Observe maximum stacking height during shipping and storage
- Avoid damage to surface finish by all means

After completion of framework installation, check entire ceiling surface to make sure that secondary profiles are perfectly aligned. Adjust easy-span hangers to make sure they fit tightly and structure is level.


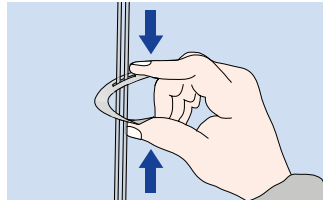


IMPORTANT!


Wear clean fabric gloves when handling tiles!

TIP: Make sure perimeter tiles are always bigger than half a tile! (Align structure accordingly). Always use tiles of same batch within one room.

All ceiling tiles have a marking on back side. Marking indicates direction of installation (it must always point in one direction). Failure to observe direction of installation results in a "shadow effect".

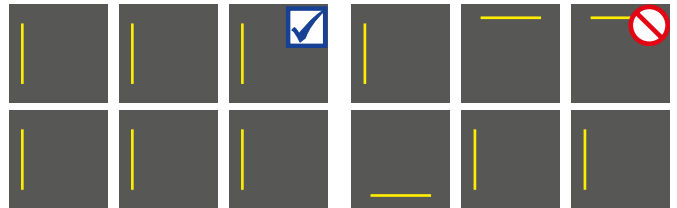

Now insert tiles in T-profiles observing special features of respective edge type. Always wear clean gloves throughout installation work.



Repair & upgrade:

Special factory-applied surface texture of tiles allows later repairs only on a minor scale. Should re-coating of ceiling tiles become necessary, paint must by all means be applied with a roller (see "Painting Instructions"). For this purpose, remove tiles from grid individually.

